


Performance Curve

SG : 1.2
REF No. A3400194
Frequency : 60Hz


MODEL: NH-401PW-F(L)

IMPELLER DIA : 93 mm


	PUMP					MOTOR	
	Discharge Capacity	Discharge Gauge Head	Suction Gauge Head	Equivalent Velocity Head	Total Head	Pump Efficiency	Power Requirement
	L/MIN	M	M	M	M	%	kW
1	0	14.5	0	0	14.5	0	0.45
2	110	12	0	0	12	40.2	0.59
3	180	9.5	0	0	9.5	48.0	0.61
4	235	6	0	0	6	40.2	0.62
5							

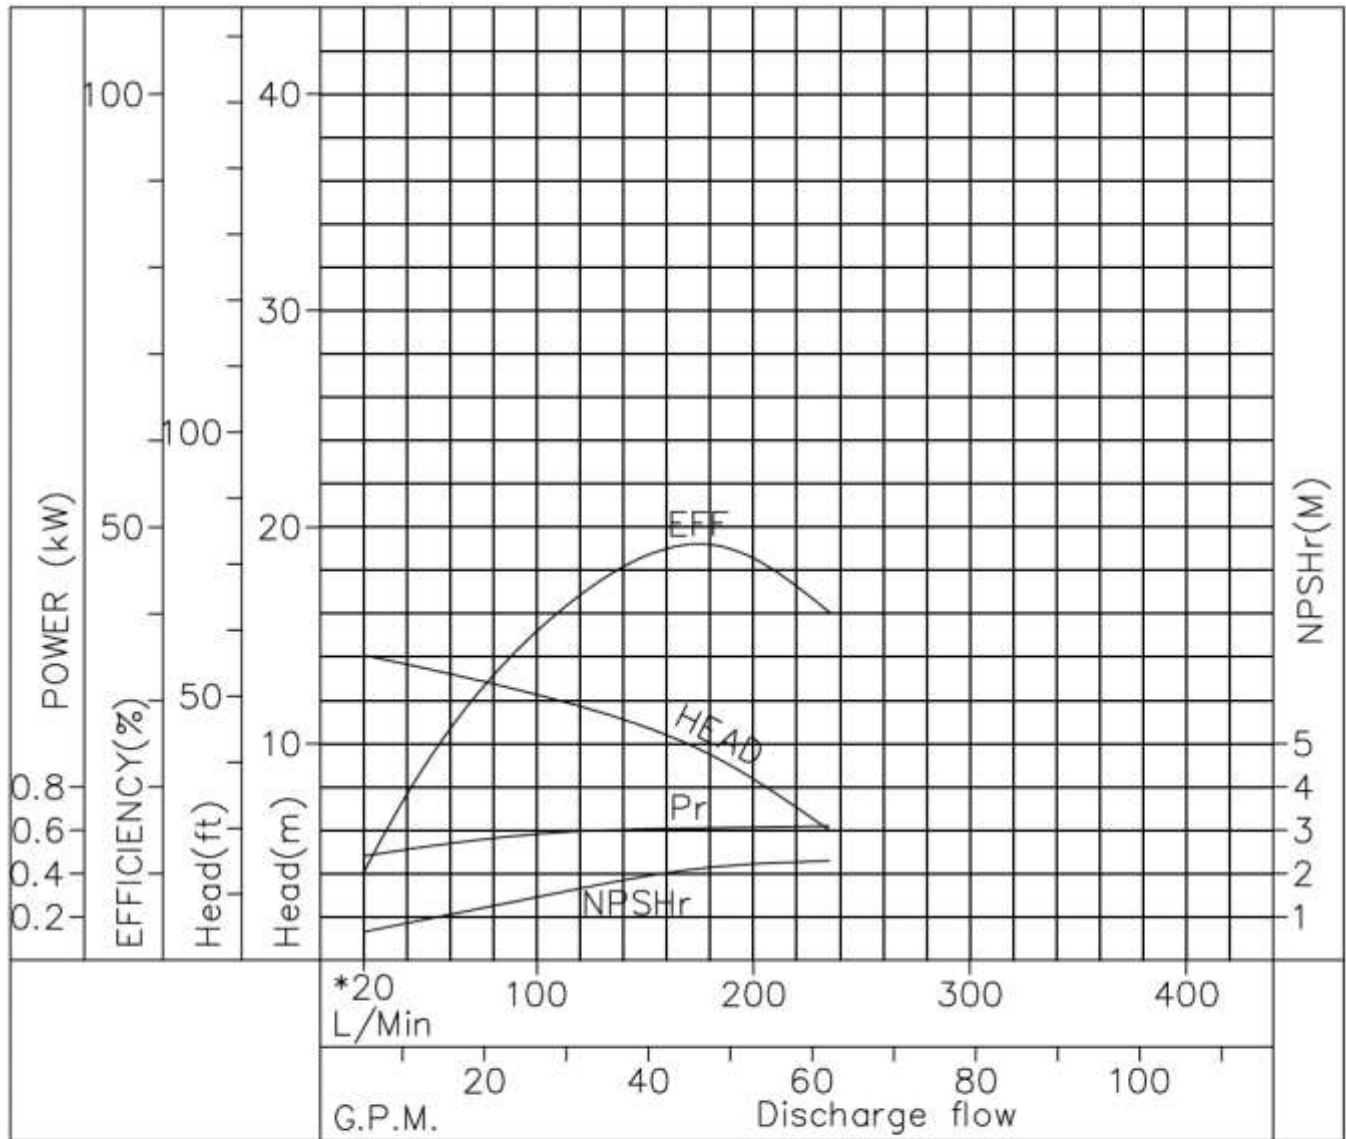

- NOTE: 1. Specified point 9.5 m at 180 l/min
 2. Rated speed 3440 R.P.M.
 3. Temperature range 0 – 90°C
 4. Motor power 0.75 kW

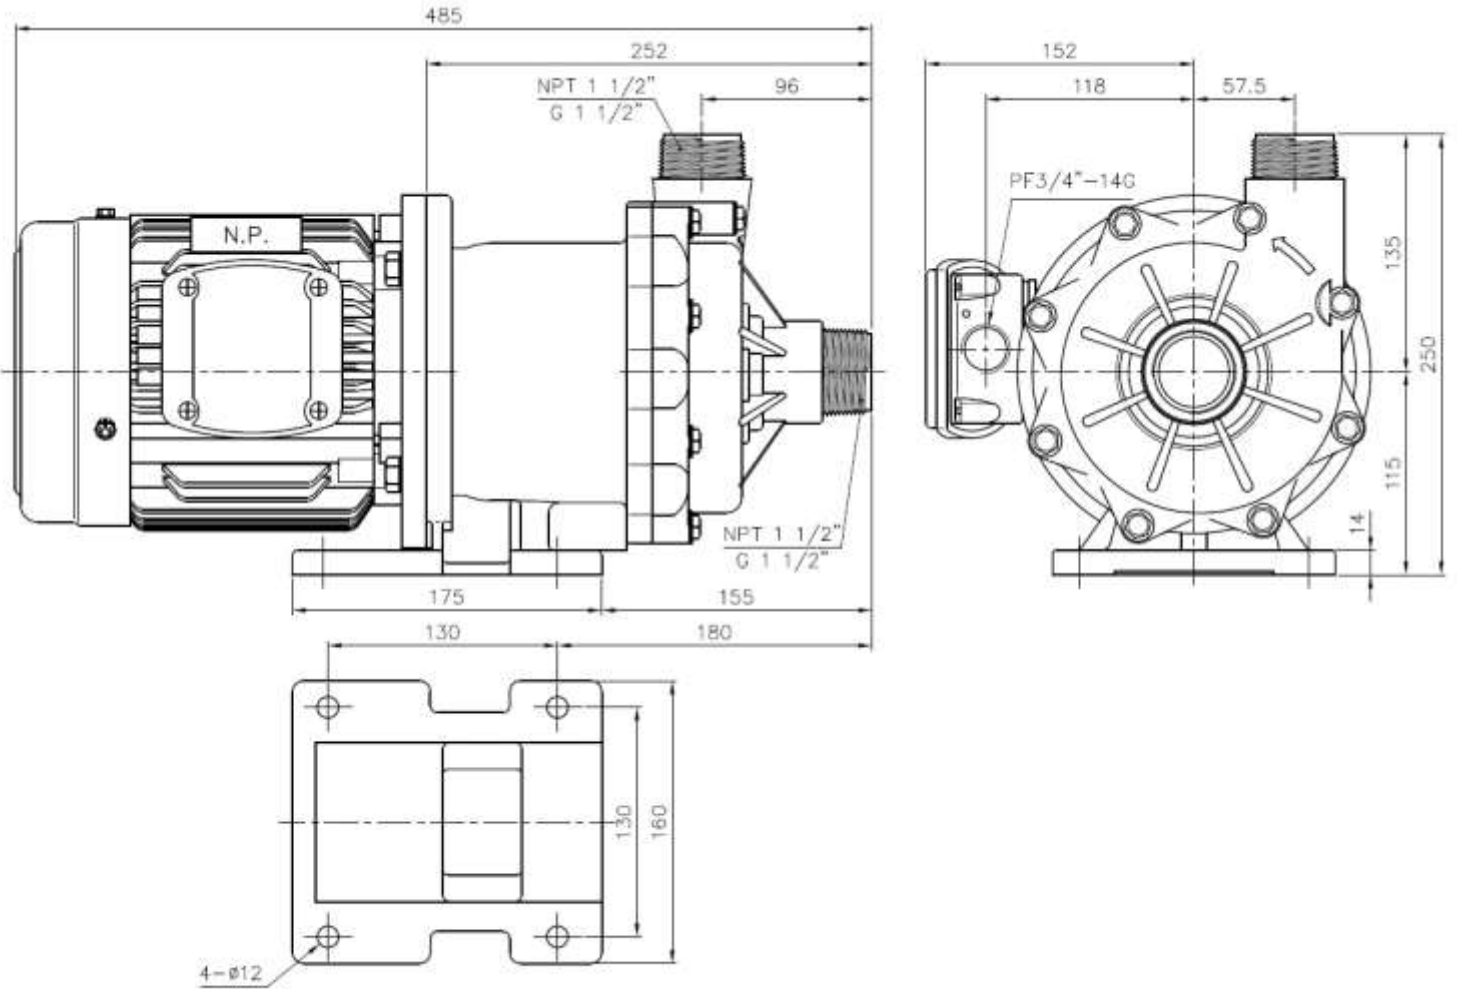

DIMENSION TOLERANCE : JIS 16 CLASS

		APPROVED		MDL, NAME	NH-401PW	NH-401PW-F
UNIT	MM	CHECK	08 09 11	DWG, NAME	NH-401PW-K	
SCALE	2:5	DESIGN	10 27 98	DWG, NO.	B1413444	A3
EDITION	3	DR.BY	08 09 11 FANNY			