


Performance Curve

SG : 1.2
REF No. A3400393
Frequency : 60Hz


MODEL: NH-6510PW-F(L)

IMPELLER DIA : 130 mm


	PUMP					MOTOR	
	Discharge Capacity	Discharge Gauge Head	Suction Gauge Head	Equivalent Velocity Head	Total Head	Pump Efficiency	Power Requirement
	L/MIN	M	M	M	M	%	kW
1	0	31.6	0	0	31.6	0	3.05
2	400	27.1	0	0	27.1	39.3	4.50
3	600	24.3	0	0	24.3	46.6	5.10
4	800	20.9	0	0	20.9	49.4	5.52
5	1000	17.6	0	0	17.6	48.0	5.98
6	1400	7.0	0	0	7.0	25.7	6.22

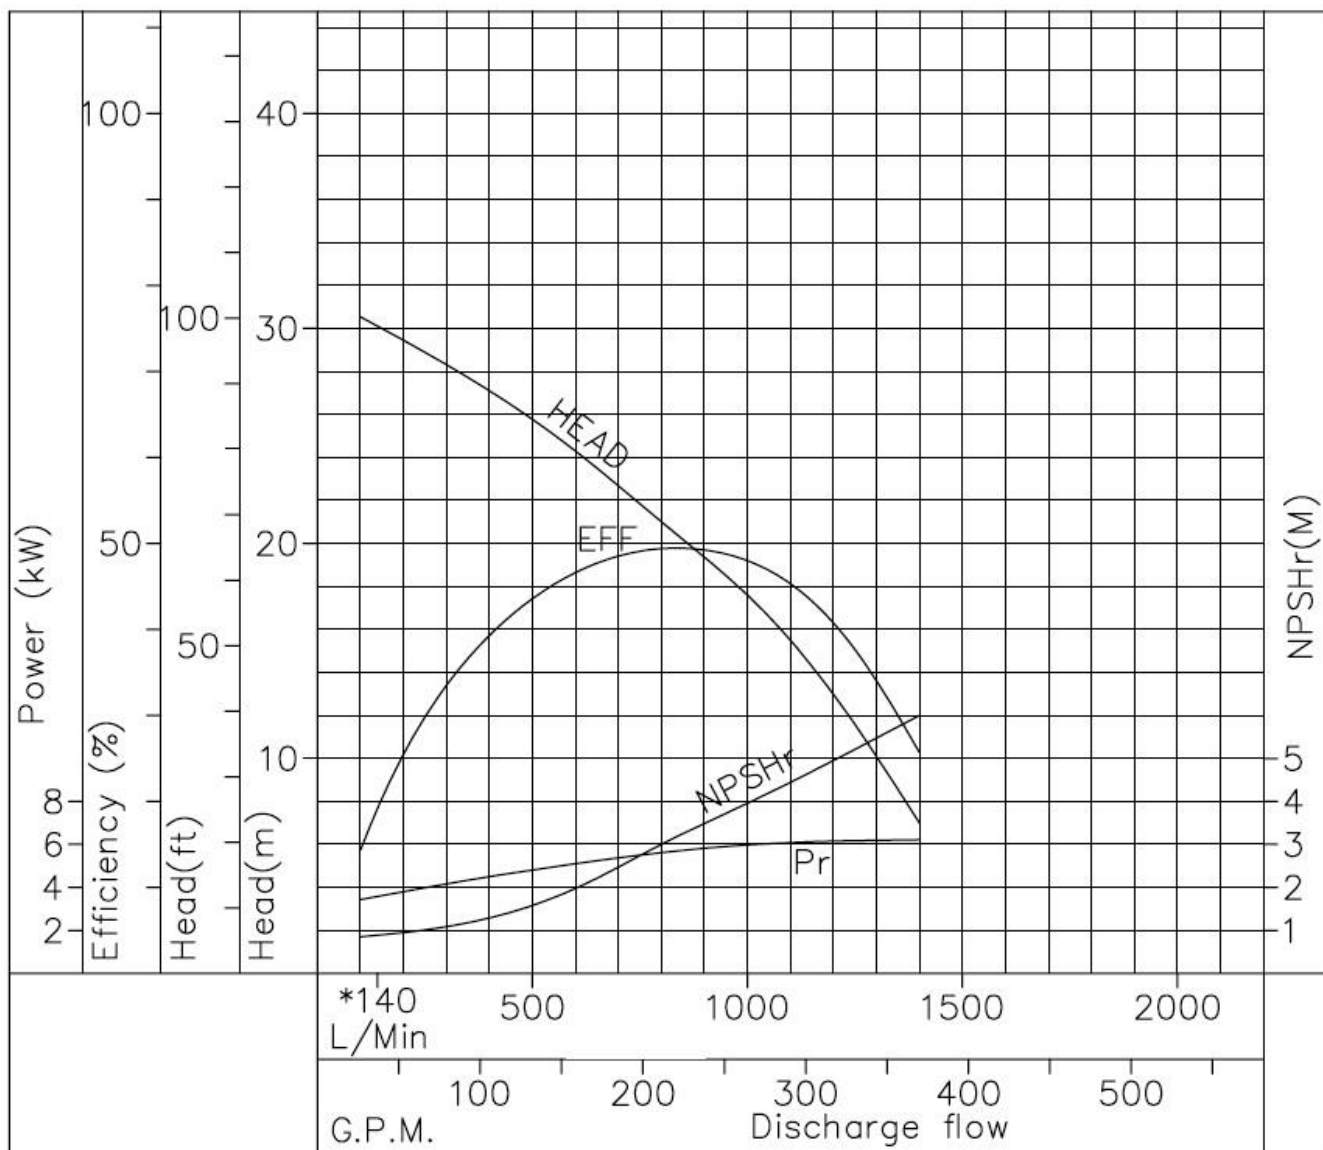

NOTE: 1. Specified point 20.7 m at 830 l/min
 2. Rated speed 3440 R.P.M.
 3. Temperature range 0 – 90°C
 4. Motor power 7.5 kW

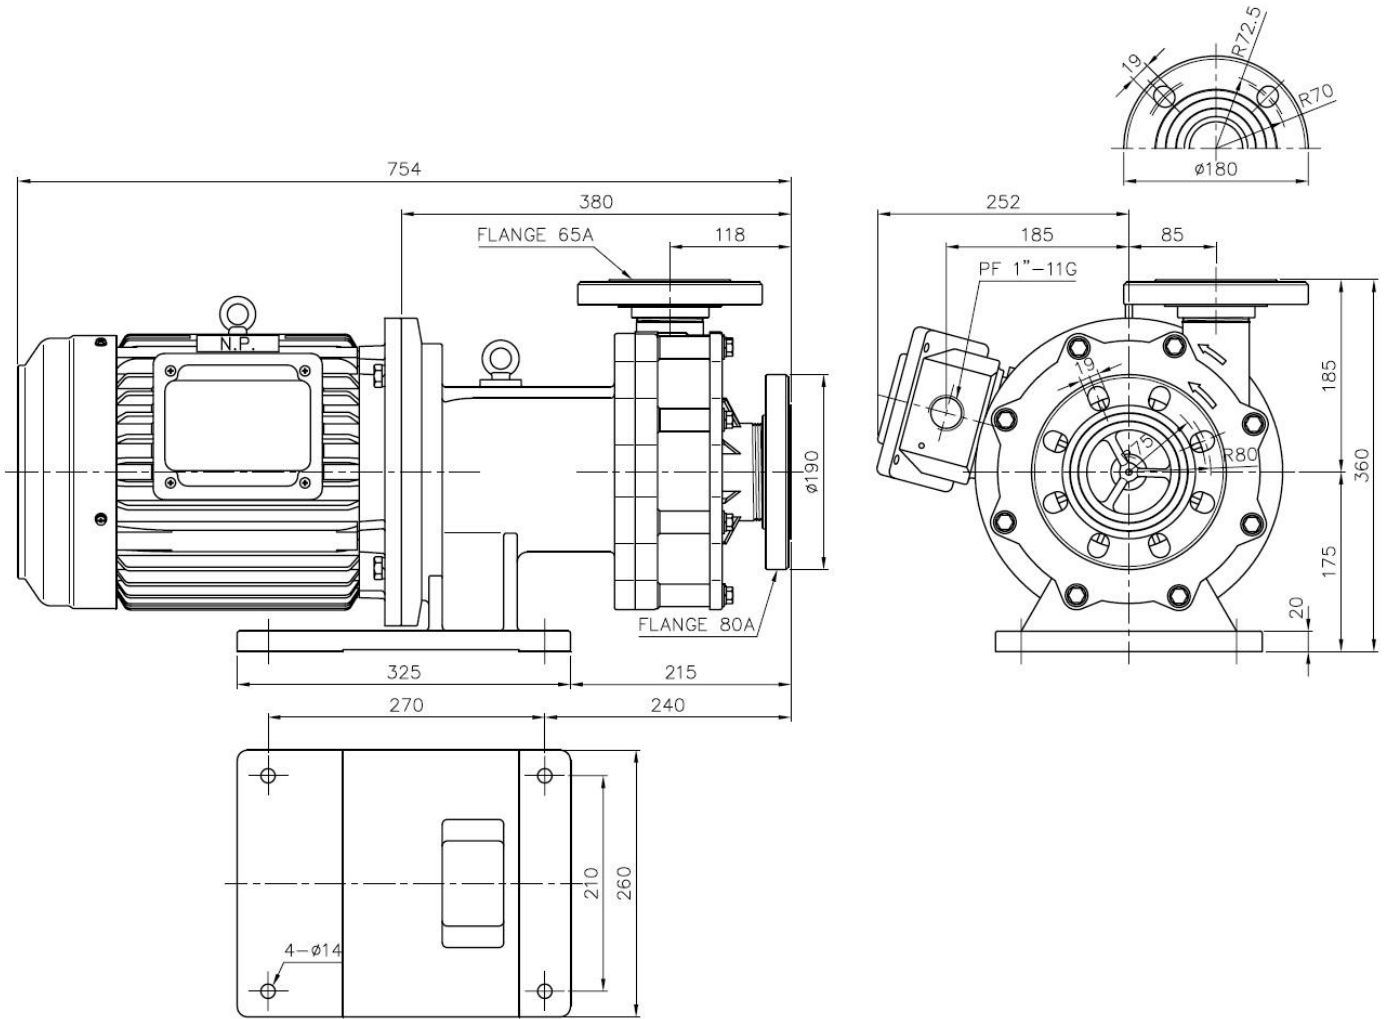

DIMENSION TOLERANCE : JIS 16 CLASS

		APPROVED		MDL, NAME		NH-6510PW/NH-6510PW-F	
UNIT	MM	CHECK	12 05 02	DWG, NAME		INSTALLATION DRAWING	
SCALE	1:4	DESIGN	01 23 02	DWG, NO.		B1683890	A3
EDITION	2	DR.BY	12 05 02 BECKY				