


Performance Curve

SG : 1.1
 REF No. A3400392
 Frequency : 60Hz


MODEL: NH-6510PW(L)

IMPELLER DIA : 133 mm

	PUMP					MOTOR	
	Discharge Capacity	Discharge Gauge Head	Suction Gauge Head	Equivalent Velocity Head	Total Head	Pump Efficiency	Power Requirement
	L/MIN	M	M	M	M	%	kW
1	0	33.6	0	0	33.6	0	3.26
2	400	30.5	0	0	30.5	41.2	4.83
3	600	26.8	0	0	26.8	46.6	5.63
4	800	23.4	0	0	23.4	49.4	6.18
5	1000	18.9	0	0	18.9	46.7	6.60
6	1400	8.9	0	0	8.9	29.8	6.82

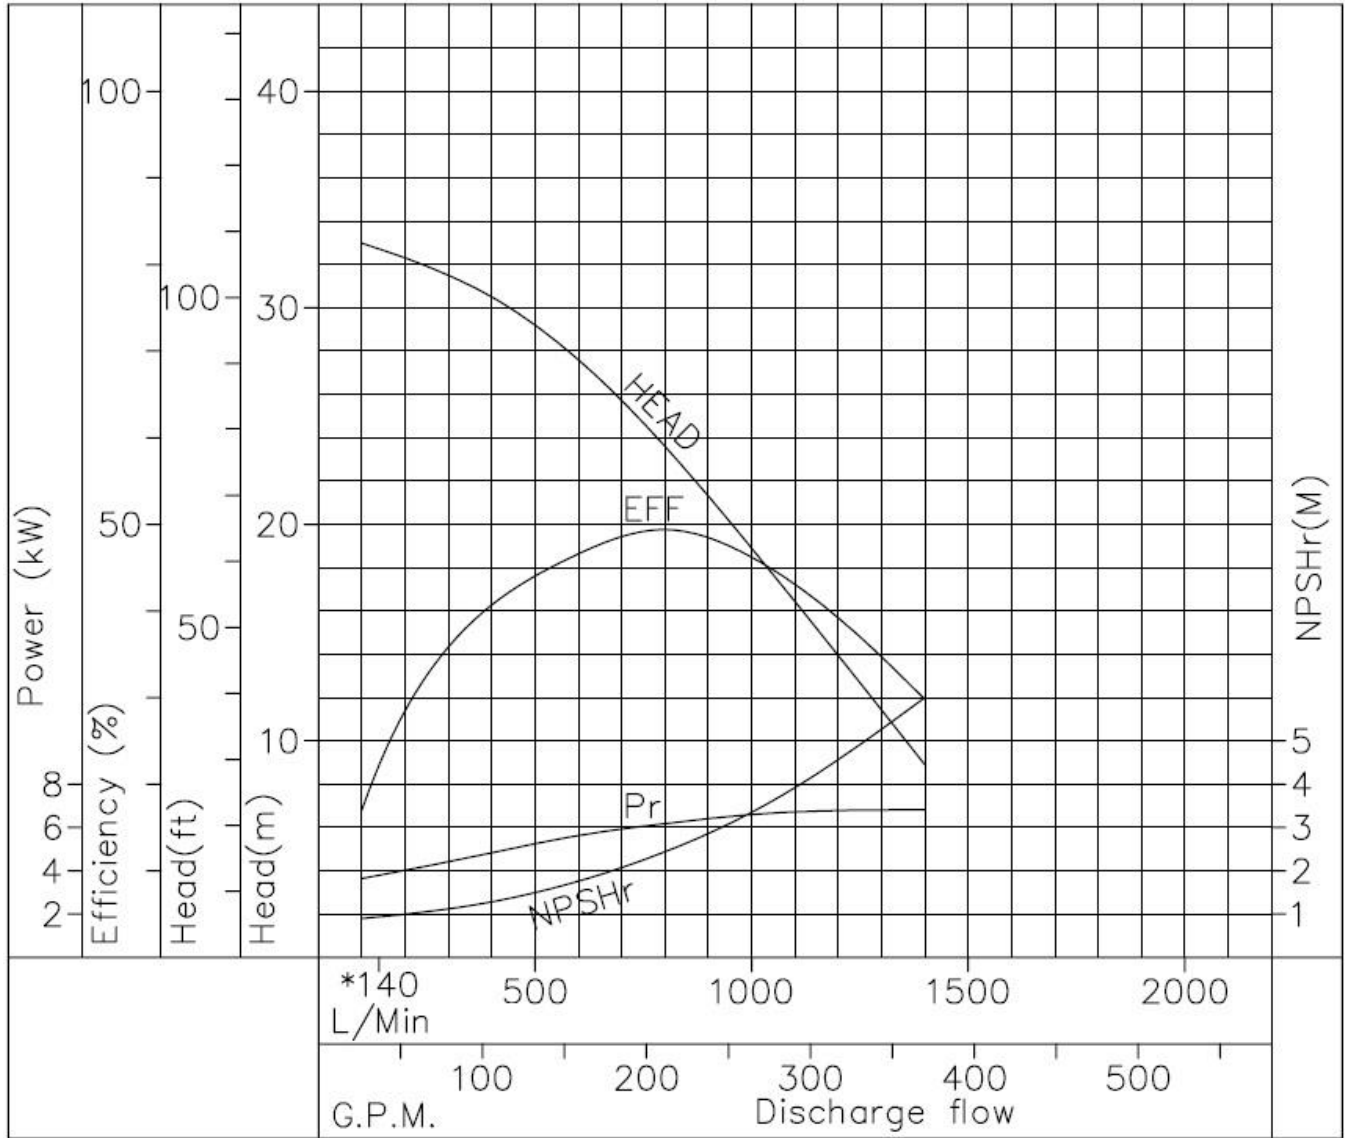

NOTE: 1. Specified point 23.4 m at 800 l/min
 2. Rated speed 3440 R.P.M.
 3. Temperature range 0 – 70°C
 4. Motor power 7.5 kW

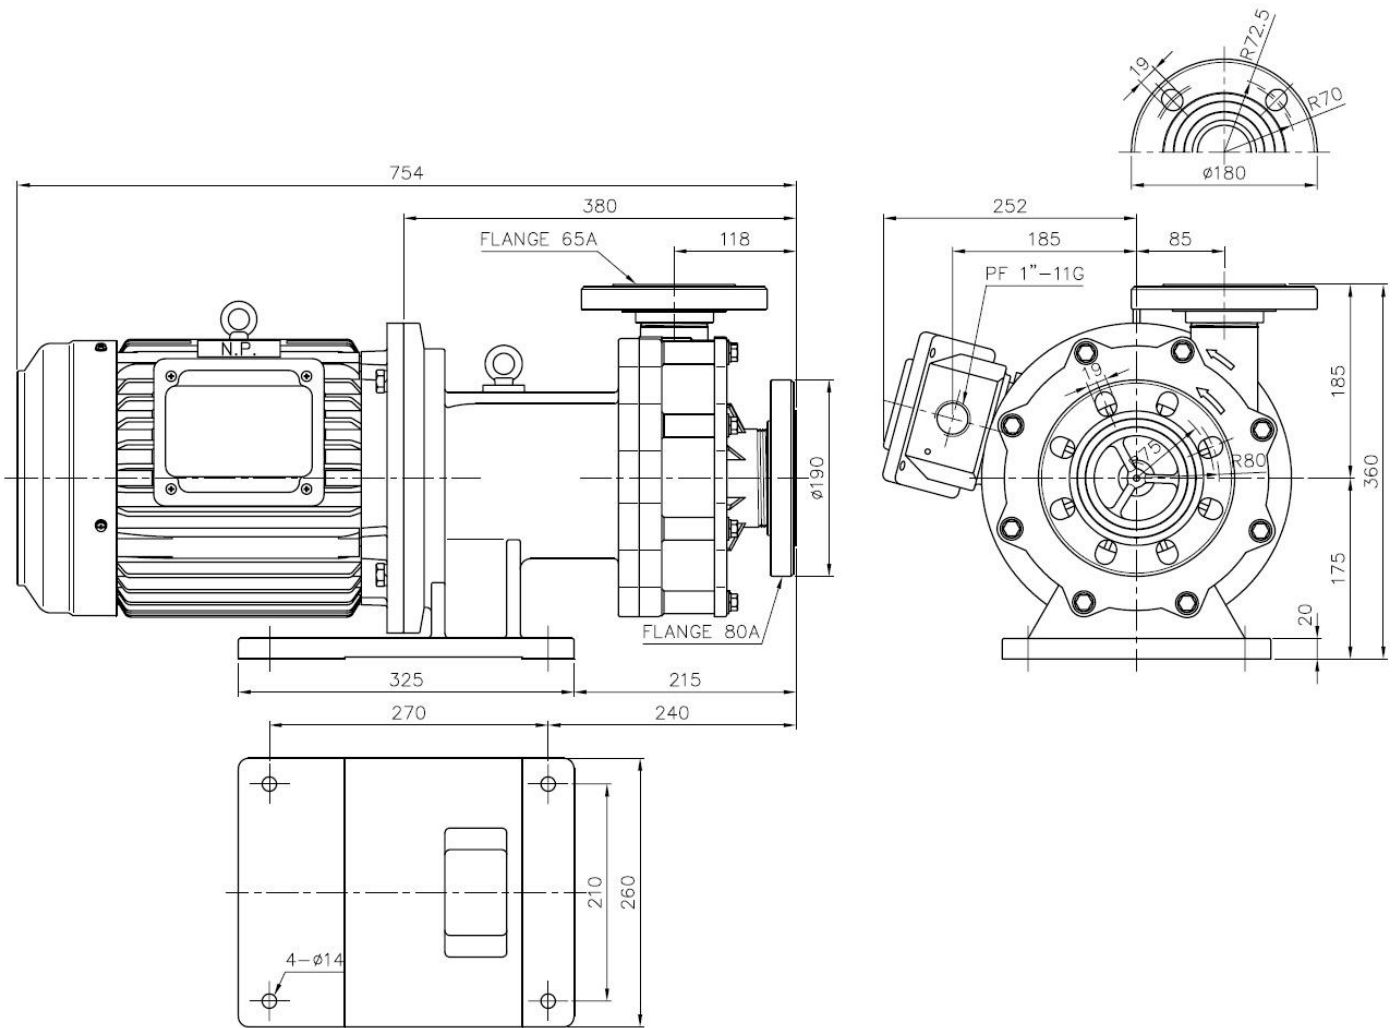

DIMENSION TOLERANCE : JIS 16 CLASS

		APPROVED		MDL, NAME	NH-6510PW/NH-6510PW-F	
UNIT	MM	CHECK	12 05 02	DWG, NAME	INSTALLATION DRAWING	
SCALE	1:4	DESIGN	01 23 02	DWG, NO.	B1683890	A3
EDITION	2	DR.BY	12 05 02 BECKY			